

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 January 2004 (08.01.2004)


PCT

(10) International Publication Number
WO 2004/004409 A1

- (51) International Patent Classification⁷: **H04R 5/04** (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (21) International Application Number: PCT/EP2002/007228
- (22) International Filing Date: 1 July 2002 (01.07.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (*for all designated States except US*): **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FIN-02150 Espo (FI).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **MARX, Jochen** [DE/DE]; Schwilmengasse 5, 89073 Ulm (DE). **GÖGGMANN, Thomas** [DE/DE]; Kantstrasse 21, 89547 Gerstetten (DE).
- (74) Agent: **VAN WALSTIJN, Gerard, G., B.**; Walstijn Intellectual Property ApS, Parkovsvej 3, DK-2820 Gentofte (DK).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: MOBILE COMMUNICATION TERMINAL

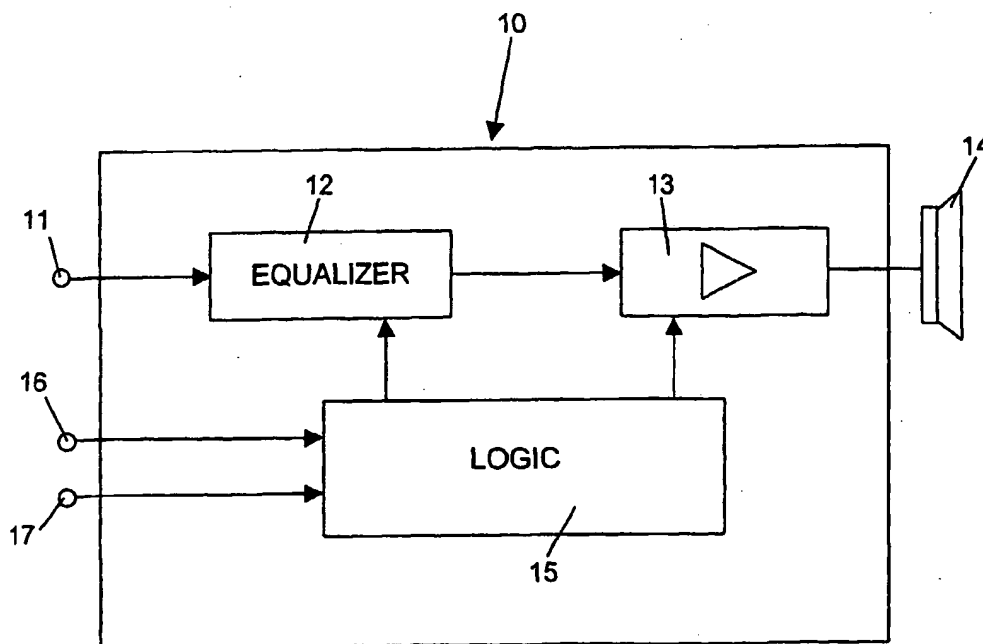

(57) Abstract: The invention relates to controlling the equalizer in a mobile communication terminal, advantageously a mobile phone. According to the invention, the communication terminal comprises means for decreasing the frequency selective attenuation by the equalizer when a maximum amplification by the amplifier has already been reached in order to increase the volume of the sound reproduced by the loudspeaker.

WO 2004/004409 A1